


GP Batteries

Data Sheet


Model No.: GP395

Description : Silver Oxide Low Drain Button Cell
 Nominal Voltage : 1.55 Volts
 Nominal Dimensions : Ø9.50 X 2.70mm
 Applications : Watch (with alarm and lamp),
 calculator, melody card etc.
 Average Weight : 0.8g
 Shelf Life : Not less than 90% of the
 service capacity, following
 1st year storage at 20°C.
 Date Code : Unless otherwise specified,
 each cell will carry a numeric
 year code and an alphabetical
 month code.
 Nominal Service Life : 1050 hrs (at 30kΩ Load)
 (to 1.2V at 20°C) 145 days (at 100kΩ Load)

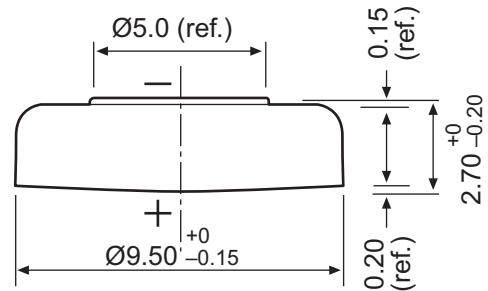

Unit : mm

Typical Discharge Characteristics at 20°C

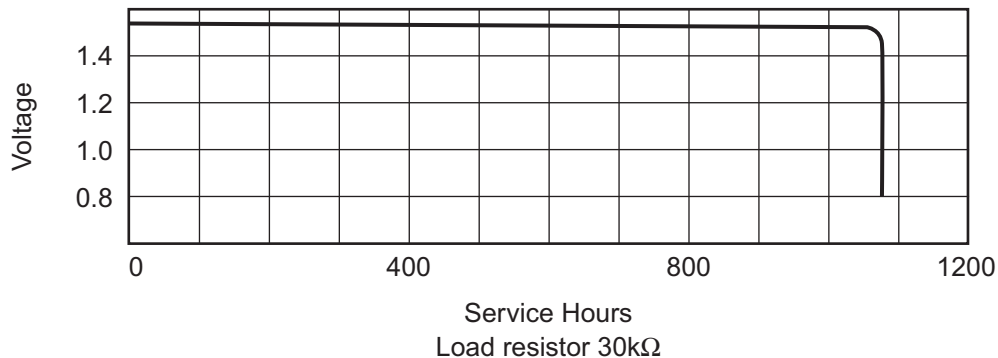

Average Service Capacity:
 55 mAh (rated capacity at 30kΩ load,
 cut off voltage 1.2V at 20°C)

Close circuit voltage:
 1.30 Volts (min.) (load resistor 200Ω at
 20°C for 1 to 2 seconds)

Cross Reference:

IEC	JIS	EVEREADY	VARTA	DURACELL	PANASONIC	SONY
SR57	SR57	395	V395	D395	SP395	SR927SW