



Type	: Alkaline High Drain Button Cell			
Chemical System	: Alkaline Manganese Dioxide			
Nominal Voltage	: 1.5Volts			
Nominal Dimensions	: $\varnothing 11.6\text{mm} \times 5.4\text{mm}$			
Application	: Calculator, hearing aid, lighter, electronic, toy, camera, ... etc.			
Average Weight	: 1.7g			
Date Code	: Unless otherwise specified, each cell Will carry a numeric year code and an alphabetical month code.			
Shelf Life	: Not less than 90% of the service capacity within first year. , not less than 85% of the service capacity with third year storage at $20 \pm 2^\circ\text{C}$ 45-75%RH			
Close Circuit Voltage	: 1.30 Volts (min.)(load resistor 100Ω at $20 \pm 2^\circ\text{C}$ for 0.1 to 2 seconds)			
Nominal Service Life(to 1.0V at $20 \pm 2^\circ\text{C}$)	: 255hrs (at 3.0 k Ω load) 175 days (at 50 k Ω load)			
Average Service Capacity (to 1.0V at $20 \pm 2^\circ\text{C}$)	: 110mAh(at 6.2 k Ω load)			
Cross References:				
IEC	JIS	Eveready	Varta	Duracell
LR44	LR44	A76	V13GA	LR44

Model No.: GPA76

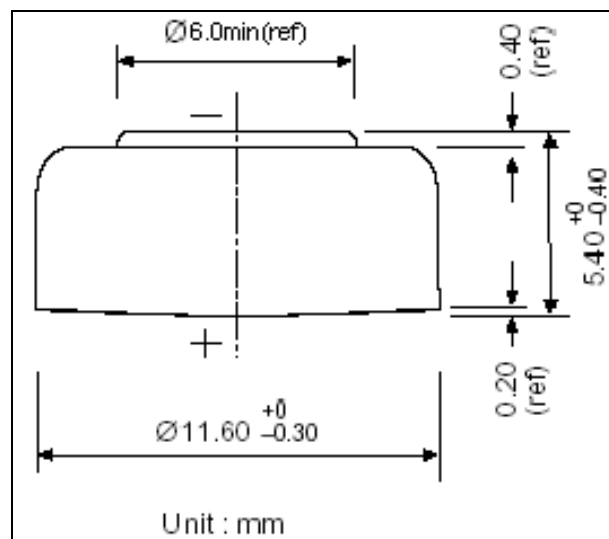

Typical Discharge characteristics at $20 \pm 2^\circ\text{C}$

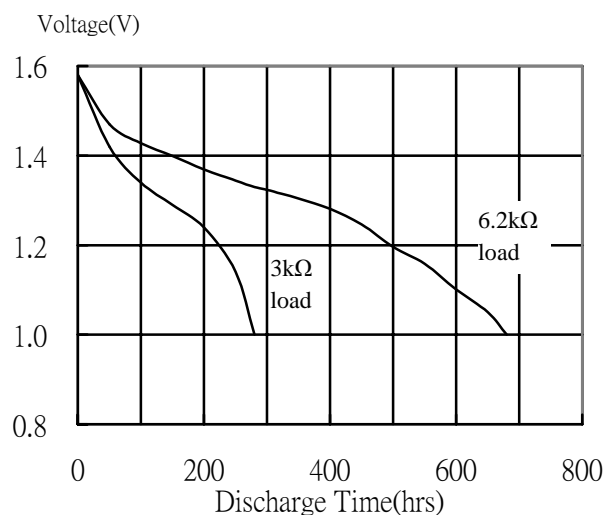

The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult your nearest GP Sales and Marketing Office or Distributors.